


KSB SERIES

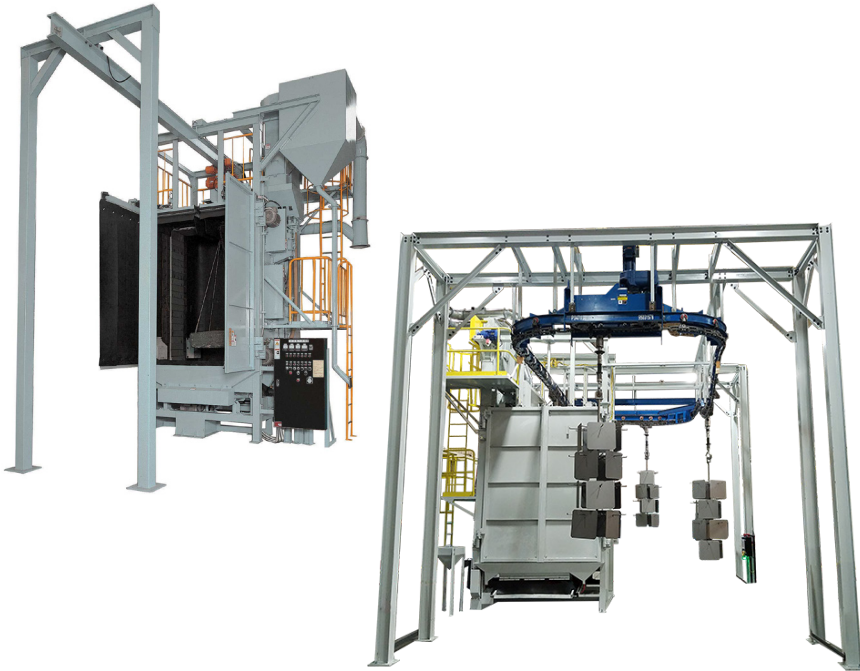

FEATURES

- | Heavy Duty and flexible
- | Easily handles heavy work pieces, products up to 5 ton can be quickly processed
- | No blind shot angles (rotation and traversing of parts in blast)
- | Can be configured with a closed or open loop monorail system
- | Can be fitted with up to 5 blast wheels
- | Automatic part manipulation and robotic tending
- | No part-on-part contact

SPINNER HANGER

ELECTRIC CHAIN HOIST WITH TROLLEY


BOTTOM SHAKER CONVEYOR ELIMINATES THE NEED FOR A PIT

BLAST 360° ANGLES WITH KSB Y TRACK



KSB SERIES

DIMENSIONS

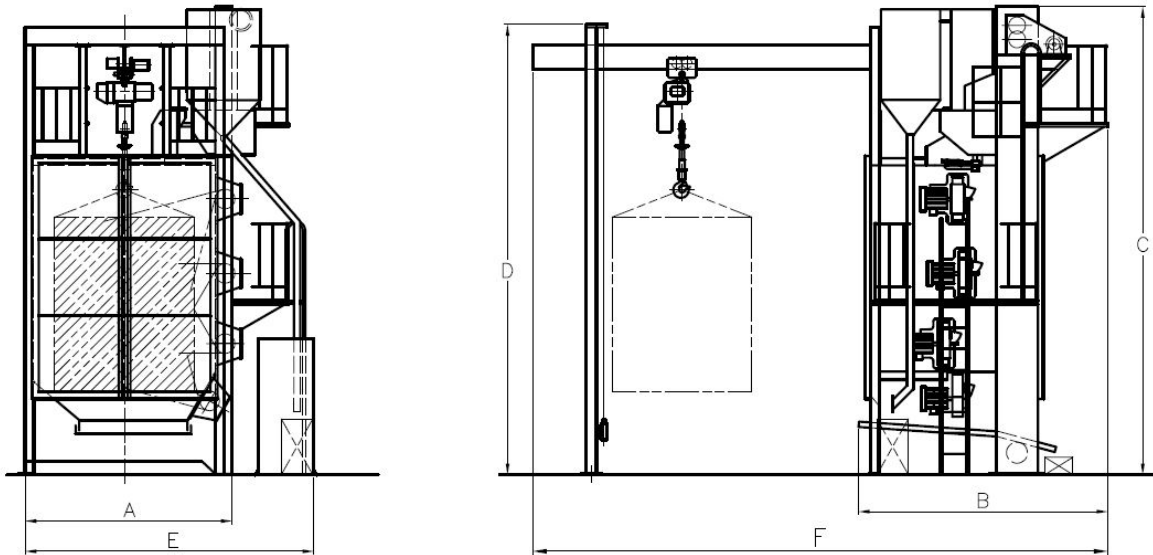

SPECIFICATIONS

Machine Description		KSB-10	KSB-25	KSB-25A	KSB-50
Cleaning Capacity	Max. Work Size (Dia. X H)	47" x 59" (1,194mm x 1,499mm)	59" x 78" (1,499mm x 1,981mm)	78" x 98" (1,981mm x 2,489mm)	98" x 118" (2,489mm x 2,997mm)
	Max. Hanger Load	1 ton. (907kg)	2.5 ton. (2,268kg)	2.5 ton. (2,268kg)	5 ton. (4,536kg)
Blast Wheel	Model	Y-30	Y-30	Y-30	Y-30
	Qty x HP	2 x 15	3 x 15	4 x 15	5 x 15
Required Ventilation (CFM)		1800	2700	3600	5300
Machine Dimensions	A	6'9" (2,057mm)	8'1" (2,464mm)	9'7" (2,921mm)	10'10" (3,302mm)
	B	9'3" (2,819mm)	10'6" (3,200mm)	11'8" (3,556mm)	10'3" (3,124mm)
	C	14'2" (4,318mm)	18'0" (5,486mm)	22' (6,706mm)	23'6" (7,163mm)
	D	14'2" (4,318mm)	17'9" (5,410mm)	21' (6,401mm)	25' (7,620mm)
	E	10'3" (3,124mm)	11'11" (3,632mm)	13'7" (4,140mm)	16'0" (4,877mm)
	F	20'5" (6,223mm)	21'3" (6,477mm)	29'6" (8,992mm)	29'5" (8,966mm)



SINTO AMERICA, INC.

SINTOKOGIO GROUP

3001 W. Main Street, PO Box 40760

Lansing, MI 48901

Tel: 517 371 2460 Fax: 517 371 4930

Web: www.sintoamerica.com Email: sales@sintoamerica.com

