

SHBX SERIES




FEATURES


- Versatile, spinner hanger designed for cleaning any parts that cannot be damaged by typical tumbling blast applications
- Productivity is improved by separating the work loading/unloading zone from the blasting zone
- Compact machine: easy install with no pit necessary
- Optional robotic load and unload
- PLC controlled with a panel view HMI
- Integrated dust collector

SPINNER HANGER MACHINE

INSIDE HANGER
BLASTING CABINET

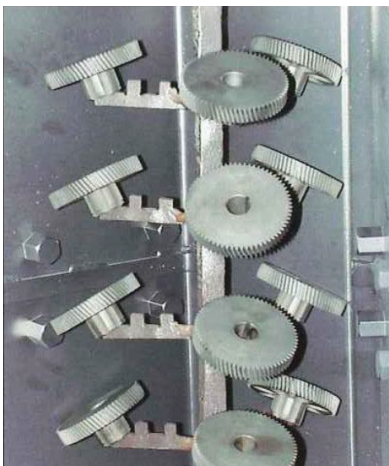

LARGE LOADING DOOR ALLOWS
FOR LARGE WORK PIECE SIZES

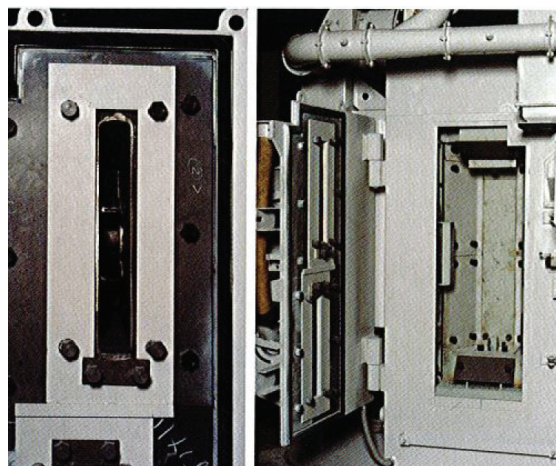


INSIDE SPINNER
HANGER APPLICATION



SHBX SERIES

DIMENSIONS

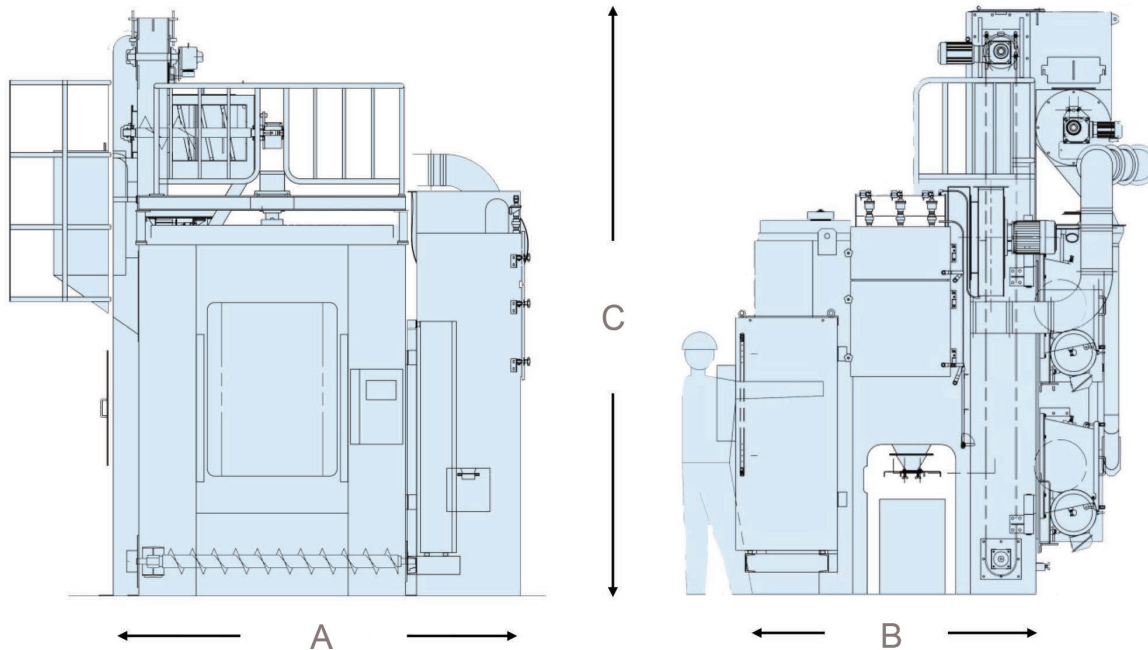

Machine Description	SHBX-I	SHBX-II	SHBX-III
A	67" (1703 mm)	61" (1550 mm)	105" (2659 mm)
B	65" (1659 mm)	80" (2033mm)	100" (2536 mm)
C	105" (2677 mm)	152" (3855 mm)	157" (4000 mm)

SPECIFICATIONS

Machine Description	SHBX-I	SHBX-II	SHBX-III
Capacity			
Area of workpiece per jig	Ø 12" x h 24" (Max) Ø 300mm x h 600mm (Max)	Ø 16" x h 29.5" (Max) Ø 400mm x h 750mm (Max)	Ø 27.5" x h 39" (Max) Ø 700mm x h 1000mm (Max)
Weight of work piece (including jig)	110 lb/jig (Max) 50 kg/jig (Max)	110 lb/jig (Max) 50 kg/jig (Max)	110 lb/jig (Max) 50 kg/jig (Max)
Impeller			
Model	D-10	Y-30	Y-30
Motor capacity (2 units)	10 hp x 2P (7.5kw x 2P)	10 hp x 2P (7.5kw x 2P)	10 hp x 2P (7.5kw x 2P)
Hanger			
Number of hangers	2	2	2
Dust Collector			
Air volume	706 ft ³ /min (20 m ³ /min)	1060 ft ³ /min (30 m ³ /min)	1060 ft ³ /min (30 m ³ /min)



SINTO AMERICA, INC.

SINTOKOGIO GROUP
 3001 W. Main Street, PO Box 40760
 Lansing, MI 48901
 Tel: 517 371 2460 Fax: 517 371 4930
 Web: www.sintoamerica.com Email: sales@sintoamerica.com

